

FANUC
ROBODRILL

DMG MORI

Mazak

LOKUMA

brother

STUDER

SPINNER

HYUNDAI WIA

TAKISAWA

Nakamura-Tome

HIMACHION

YCM

DN SOLUTIONS

YGM REVO
GANTRY PRODUCTION CENTER

WOODWAY

Tongtai

YOU JI

VICTOR TAICHUNG

QUASER
we cut faster

MITSUBISHI ELECTRIC

FANUC

HEIDENHAIN

SIEMENS

HAAS

SYNTEC
TECHNOLOGY CO., LTD.

"Compatible with these brands and all CNC control and machine brands"

CNC DOORMATIC

AUTOMATIC DOOR FOR CNC AUTOMATION SYSTEMS

cncdoormatic.com

HOSAB Sanayi Cad. No: 33

Nilüfer - Bursa / TÜRKİYE

ilker@cncdoormatic.com

gokturk@genadoor.com

cncdoormatic.com


@cncdoormatic

/CNC DOORMATIC



CNC DOORMATIC

AUTOMATIC DOOR FOR CNC AUTOMATION SYSTEMS

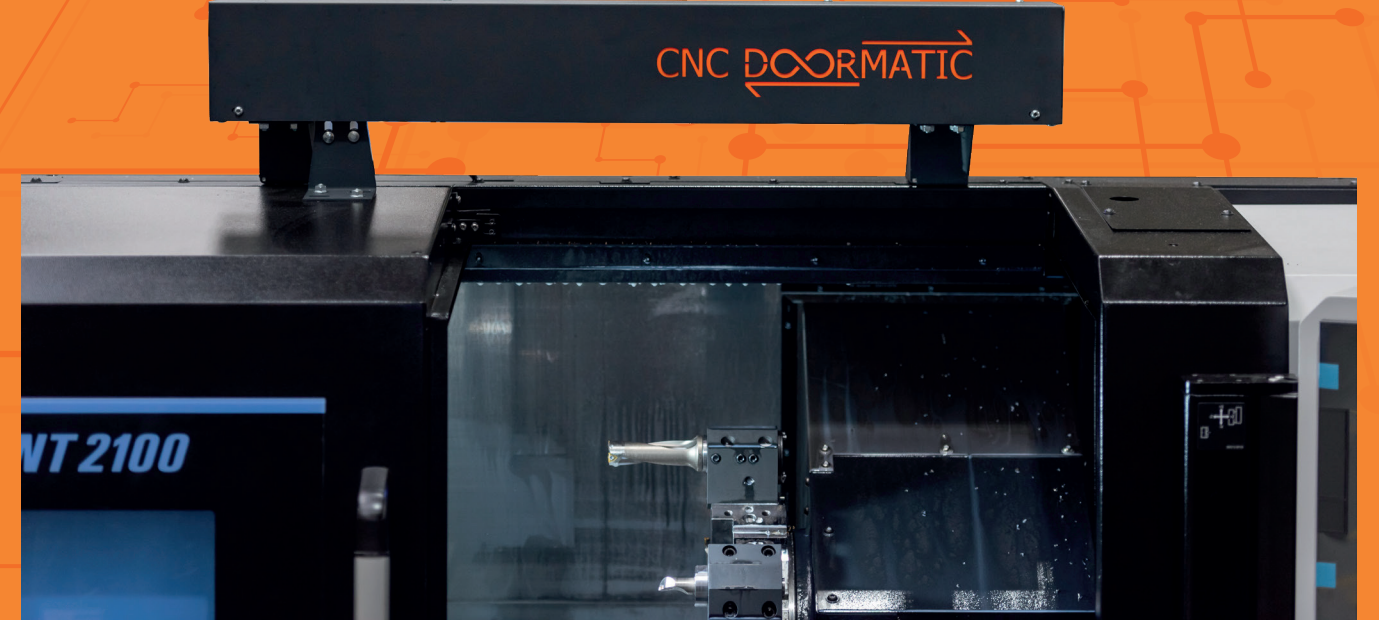

emay
G R O U P
Since 1954




Opens to the future...

CNC DOORMATIC

CNC Doormatic door openers are designed to automatically open and close the doors of CNC machines. Servo motor door openers are equipped with a self-learning control module that automatically detects resistance. CNC Doormatic is 100% reliable and can be used with additional switches, light sensors, pressure switches, etc.

Why Use CNC DOORMATIC?

CNC Doormatic is an automation system that can automatically open the doors at the desired gap size on CNC machines, has a door opening that can be adjusted with parameters, works in harmony with all control units, and is compatible with CNC I/O inputs.

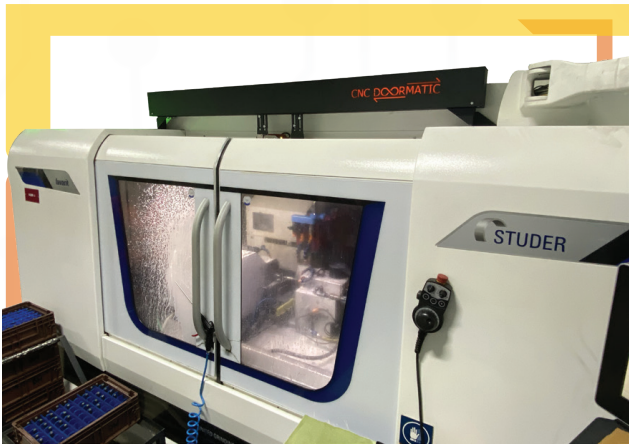

MECHANICALLY COMPATIBLE
Minimum Service Cost



% 100 safe



FAST SERVICE With a Professional Team



ENERGY During Operation It Consumes Energy As Much As a 65 W Lamp.



2 years warranty



Health Care



SPARE PARTS Without being dependent, all parts are manufactured by CNC DOORMATIC



PM GEARLESS MOTORS Silent and Heavy Duty




CE Certificate




Output for machine to give close command to the automatic door
Output for machine to give open command to the automatic door
Output for machine to give deactivate command to the automatic door
Minimizing time cost with ADJUSTABLE opening distance feature

Error input
Input for "door opened" info
Input for "door closed" info
Input for "re-open" info


SERVO SINGLE DOOR DIMENSIONS

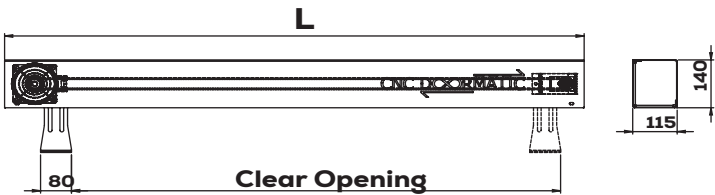


SERVO DOUBLE DOOR DIMENSIONS

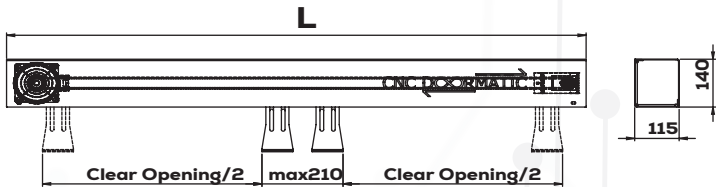

SERVO 2 MOTOR DOUBLE DOOR DIMENSIONS

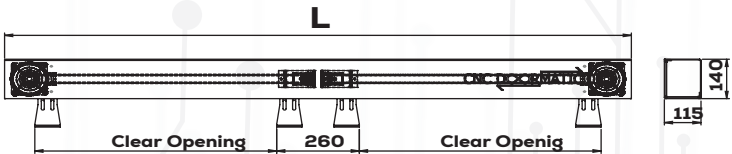

SERVO TELESCOPIC DOOR DIMENSIONS

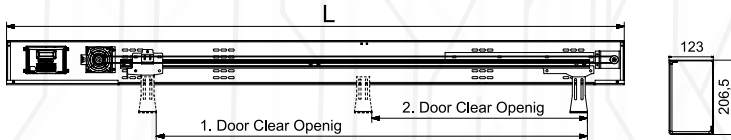

PRODUCT CODE	CLEAR OPENING	L
CDSS750	750mm	1000mm
CDSS1115	1115mm	1365mm
CDSS1615	1615mm	1865mm
CDSS2115	2115mm	2365mm
CDSS2615	2615mm	2865mm

PRODUCT CODE	CLEAR OPENING	L
CDDS1000	1000mm	1365mm
CDDS1500	1500mm	1865mm
CDDS2000	2000mm	2365mm
CDDS2500	2500mm	2865mm
CDDS3000	3000mm	3365mm

PRODUCT CODE	CLEAR OPENING	L
CDES750	2X750mm	1950mm
CDES1000	2X1000mm	2450mm
CDES1250	2X1250mm	2950mm
CDES1500	2X1500mm	3450mm
CDES2000	2X2000mm	4450mm

PRODUCT CODE	CLEAR OPENING	L
CDTS 1500	1X1500-1X750mm	2365mm
CDTS 2000	1X2000-1X1000mm	2865mm
CDTS2500	1X2500-1X1250mm	3365mm
CDTS 3000	1X3000-1X1500mm	3865mm

- * It has been determined by reports that it provides 8%-12% time saving in operation times in human - oriented productions.
- * We are % 100 manufacturer of Servo Brushless Motor, Servo direct driver and software
- * You can open door (1000 mm) is only 2 seconds
- * Can work with all robot automations

- * Security re-open mode
- * Universal assembly brackets
- * No need extra sensor, or anything (everything is included in mechanism)
- * Adjustable opening size